

INPUT**Frequency**

10 MHz

Level

+7 dBm ±6 dB into 50 ohms

OUTPUT**Frequency**

10 GHz

Level

+13 dBm ±2 dB into 50 ohms

STABILITY**Aging (free-running)**1 x 10⁻⁶ first year

after 30 days operating, typical

5 x 10⁻⁷ second year, typical3 x 10⁻⁷ per year thereafter, typical**Phase Noise L(f), typical, (free-running)**

100 Hz -87 dBc/Hz

1 KHz -113 dBc/Hz

10 KHz -131 dBc/Hz

100 KHz -132 dBc/Hz

Temperature Stability±5 x 10⁻⁷ free-running from 0 to +50°C
(Ref. +25°C)**Harmonics**

≤ -25 dBc

Sub-Harmonics

≤ -60 dBc

PLL Divider Products

≤ -60 dBc

Spurious≤ -80 dBc, excluding power
supply line related spurs**Phase Lock Alarm**

TTL

Locked: +3.5 VDC to +5.2 VDC (Hi)

Out-of-Lock: +0.8 VDC max (Lo)

Phase Lock Voltage Monitor

Voltage monitor pin supplied

MECHANICAL**Dimensions**

5.36 x 4 x 1"

Connectors

RF Input/Output: SMA(f)

Power, Monitoring: Feed Thru Terminals

GND: Ground Turret

PackagingNickel-plated machined
aluminum housing – J3P**Mounting**Threaded inserts on base,
#2-56, 6 places**POWER REQUIREMENTS****Warm-Up Power**

≤ 17 Watts for 5 minutes

Total Power

≤ 13.5 Watts at +25°C

Supply Voltage

+15 VDC ±5%

ADJUSTMENT**Loop BW**Target Bandwidth: < 10 Hz
Type 2 Loop**CRYSTAL****Type**

100 MHz SC-cut (x100)

OTHER**Label**Use conventional label with the
following information:
501-24230 (Current Rev.)
10 GHz MXO-PLD
+15 VDC
Serial # - Date Code
(Mark connectors with function)**Test Data**

Output Level

Phase Noise – free-running

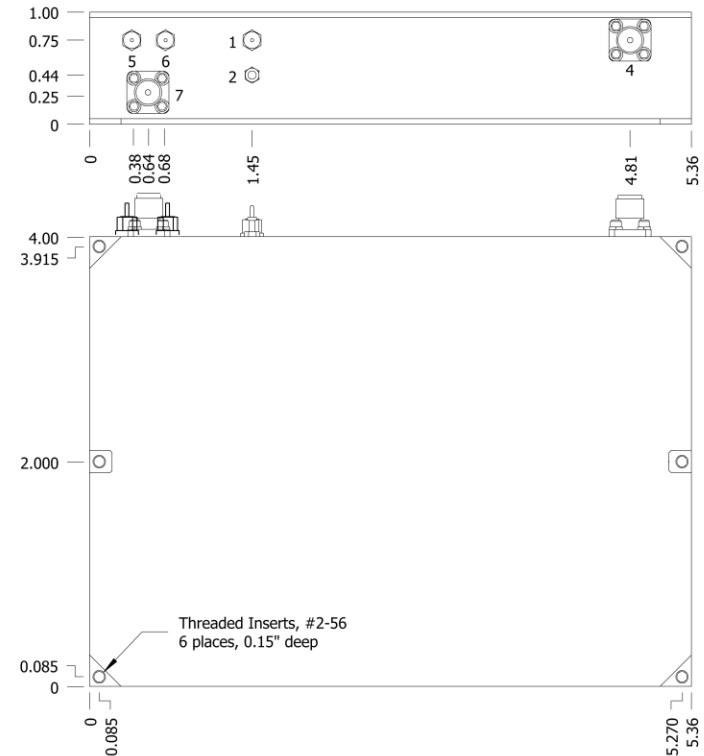
Temperature Stability – free-running

Harmonics, Subs, Spurious

Power – Warm-up and Total

REV	DATE	REVISION RECORD	DWN	AUTH
-	07-11-11	Initial Release	PAC	
A	01-17-12	Input Level Tolerance; Phase Noise	PAC	
B	05-30-12	Phase Noise 10 kHz and 100 kHz	PAC	JR

J3P MXO Connections	
Connector	Function
1	Supply Voltage
2	Ground, Case
4	RF Output
5	Phase Lock Voltage
6	Phase Lock Alarm
7	External Reference Input

**Wenzel Associates, Inc.**

Austin, Texas

Title:

10 GHz Multiplied Crystal Oscillator (MXO-PLD)

P/N:

501-24230

Rev:

B

Date:

05-30-12

Drawn:

Ref:

Tolerances:
(except as noted)
Dimensions are in inches0.XX Dec:
±0.030"0.XXX Dec:
±0.010"FSCM:
62821

Page 1 of 1