

OUTPUT A

Frequency

100 MHz

Level

+13 dBm ± 2 dB into 50 ohms

Phase Noise L(f), Static

100 Hz -130 dBc/Hz

1 kHz -158 dBc/Hz

10 kHz -173 dBc/Hz

100 kHz -175 dBc/Hz

OUTPUT B

Frequency

2 GHz

Level

+13 dBm ± 2 dB into 50 ohms

Phase Noise L(f), Static

100 Hz -102 dBc/Hz

1 KHz -129 dBc/Hz

10 KHz -146 dBc/Hz

100 KHz -147 dBc/Hz

STABILITY

Aging

1×10^{-6} first year

after 30 days operating, typical

5×10^{-7} second year, typical

3×10^{-7} per year thereafter, typical

Temperature Stability

$\pm 5 \times 10^{-7}$, 0° to +50°C (Ref +25°C)

Harmonics

≤ -25 dBc

Sub-Harmonics

≤ -50 dBc

Spurious

≤ -80 dBc, excluding power
supply line related spurs

MECHANICAL

Dimensions

3.21 x 4 x 1"

Connectors

SMA(f) and solder pins

Packaging

Nickel-plated machined
aluminum housing – J2-03

Mounting

Threaded inserts on base,
#2-56, 6 places

POWER REQUIREMENTS

Warm-Up Power

≤ 12.5 Watts for 5 minutes

Total Power

≤ 9 Watts at +25°C

Supply Voltage

+15 VDC $\pm 5\%$

ADJUSTMENT

Mechanical Tuning

$\pm 4 \times 10^{-6}$

Electrical Tuning

$\pm 5 \times 10^{-7}$, ± 5 VDC

Negative slope

CRYSTAL

Type

100 MHz SC-cut (x20)

OTHER

Label

Use conventional label with the
following information:

501-25472 (Current Rev.)

100M/2G MXO-FR

+15 VDC

Serial # - Date Code

(Mark connectors with function)

Test Data

Output Level

Phase Noise – Static

Temperature Stability

Harmonics, Subs, Spurious


Power - Warm-up and Total

Tuning – MT and ET

REV	DATE	REVISION RECORD	DWN	AUTH
-	06-15-12	Initial Release	PAC	

J2-03 MXO Connections

Connector	Function
1	Supply Voltage
2	Ground, Case
3	Electrical Tuning
4	RF Output B
8	RF Output A

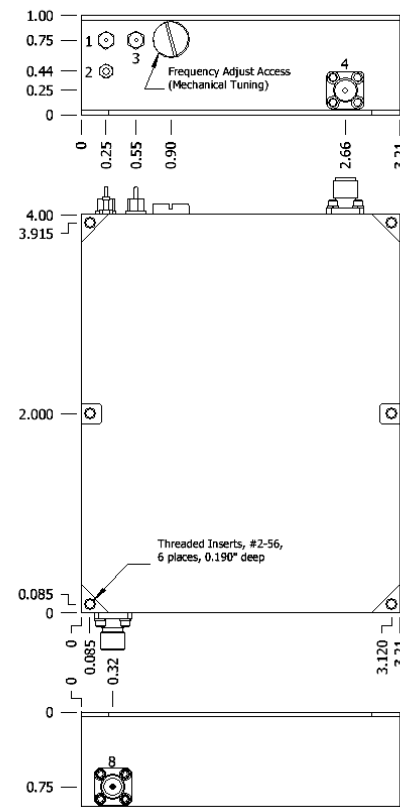

Wenzel Associates, Inc.

Austin, Texas

Title:

**100 MHz & 2 GHz
Multiplied Crystal Oscillator (MXO-FR)**

P/N: 501-25472	Rev: -	Date: 06-15-12	Drawn:	Ref:
Tolerances: (except as noted) Dimensions are in inches	0.XX Dec: ± 0.030"	0.XXX Dec: ± 0.010"	FSCM: 62821	Page 1 of 1