

OUTPUT**Frequency**

50 MHz

Level

+13 dBm ±2dB into 50 ohms

STABILITY**Aging (typical)**1 x 10⁻⁶ per year after 30 days operating5 x 10⁻⁷ second year3 x 10⁻⁷ per year, thereafter**Phase Noise L (f)**

	Standard	Premium
100 Hz	-134 dBc/Hz	-140 dBc/Hz
1 kHz	-164 dBc/Hz	-169 dBc/Hz
10 kHz	-174 dBc/Hz	-177 dBc/Hz
100 kHz	-175 dBc/Hz	-178 dBc/Hz

Temperature StabilityE: ±2 x 10⁻⁷, 0° to +50°C (Ref +25°C)F: ±5 x 10⁻⁷, -20 to +70°C (Ref +25°C)**Harmonics**

≤ -30 dBc

Spurious

≤ -80 dBc, excluding power supply line related spurs

MECHANICAL**Dimensions**

1.75 x 2.94 x 1"

Connectors

SMA(f) and solder pins on side

Packaging

Solder sealed steel can

POWER REQUIREMENTS**Warm-Up Power**

≤ 5 Watts for 5 minutes at +25°C

Total Power

≤ 2.5 Watts at +25°C

Supply Voltage

+15 VDC ±5% or +12 VDC ±5%

ADJUSTMENT

(consult factory for non standard tuning options)

Mechanical Tuning±4 x 10⁻⁶**Electrical Tuning**±2 x 10⁻⁷, ±5 VDC, Negative slope**CRYSTAL****Type**

50 MHz SC-cut

REV	DATE	REVISION RECORD	DWN	AUTH
-	12-2-13	Draft	CB	PAC

Ordering Options

-xx	Voltage	Phase Noise L(f)	Package	Temp (Ref +25 °C)
01	+15V	Standard	A	E
02	+15V	Standard	A	F
11	+15V	Premium	A	E
12	+15V	Premium	A	F
21	+12V	Standard	A	E
22	+12V	Standard	A	F
31	+12V	Premium	A	E
32	+12V	Premium	A	F

**Wenzel Associates, Inc.**

Austin, Texas

Title:

50 MHz-SC Ultra Low Noise Crystal Oscillator

P/N:

501-27522-xx

Rev:

-

Date:

12-2-13

Drawn:

Ref:

Tolerances:
(except as noted)
Dimensions are in inches

0.XX Dec:

±0.030"

0.XXX Dec:



±0.010"

FSCM:

62821

Page 1 of 2

Package A

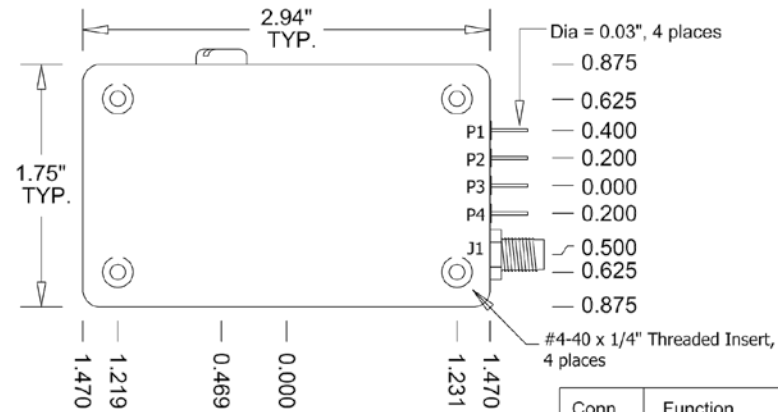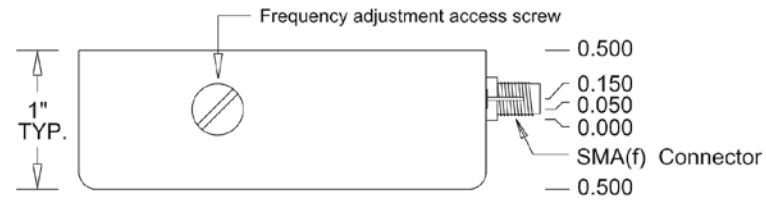

Connector numbers are for reference only, they do not appear on unit.

Conn	Function
J1	RF Output
P1	N/C
P2	Electrical Tuning
P3	Supply Voltage
P4	Case Ground

Wenzel Associates, Inc.

Austin, Texas

Title:

50 MHz-SC Ultra Low Noise Crystal Oscillator

P/N:

501-27522-xx

Rev:

-

Date:

12-2-13

Drawn:

Ref:

Tolerances:
(except as noted)
Dimensions are in inches

0.XX Dec:

±0.030"

0.XXX Dec:

±0.010"

FSCM:

62821

Page 2 of 2