

OUTPUTS

| Output | Frequency | Level (into 50Ω) |
|--------|-----------|------------------|
| A | 100 MHz | +16 ±2 dBm |
| B | 2.5 GHz | +16 ±2 dBm |

STABILITY

Aging

- 1 x 10⁻⁶ first year
- after 30 days operating, typical
- 5 x 10⁻⁷ second year, typical
- 3 x 10⁻⁷ per year thereafter, typical

Phase Noise L(f), dBc/Hz, typical

| | 100 MHz | 2.5 GHz |
|---------|---------|---------|
| 10 Hz | -105 | -75 |
| 100 Hz | -136 | -106 |
| 1 kHz | -162 | -131 |
| 10 kHz | -183 | -151 |
| 100 kHz | -188 | -153 |
| 1 MHz | -188 | -154 |

Temperature Stability

±5 x 10⁻⁷, 0 to +50°C (Ref. +25°C)

Harmonics

≤ -25 dBc

Sub-Harmonics

≤ -60 dBc

Spurious

≤ -80 dBc, excluding power
supply line related spurs

MECHANICAL

Dimensions

4.21 x 4 x 1"

Connectors

RF Outputs: SMA(f)
Power, ET: Feed Thru Terminals
GND: Ground Turret

Packaging

Nickel-plated machined
aluminum housing – G2-03

Mounting

Threaded inserts on base,
#2-56, 6 places

POWER REQUIREMENTS

Warm-Up Power

≤ 17.5 Watts for 5 minutes

Total Power

≤ 13.5 Watts at +25°C

Supply Voltage

+15 VDC ±5%

ADJUSTMENT

Mechanical Tuning

±4 x 10⁻⁶

Electrical Tuning

±5 x 10⁻⁷, ±5 VDC
Negative Slope

CRYSTAL

Type

100 MHz SC-cut (x25)

OTHER


Label

Use conventional label with the
following information:
501-28809 (Current Rev.)
100M/2.5G GMXO-FR
+15 VDC
Serial # - Date Code
(Mark connectors with function)

Test Data

- Output Level
- Phase Noise
- Temperature Stability
- Harmonics, Subs, Spurious
- Power – Warm-up and Total

| REV | DATE | REVISION RECORD | DWN | AUTH |
|-----|----------|-----------------|-----|------|
| - | 03-02-15 | Initial Release | PAC | |
| | | | | |
| | | | | |
| | | | | |

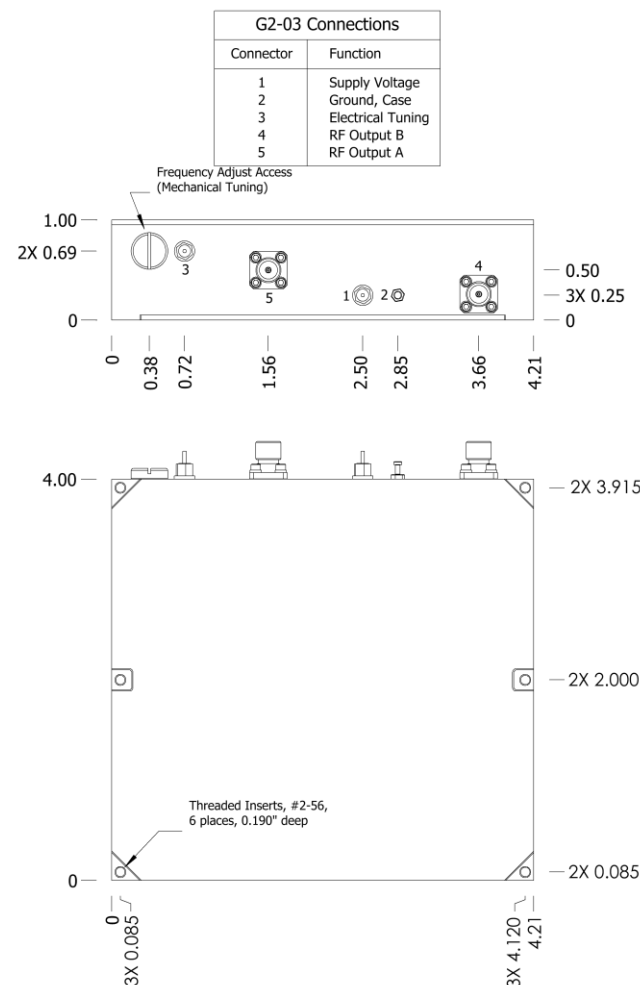

Wenzel Associates, Inc.
Austin, Texas

Title:

**100 MHz & 2.5 GHz Golden
Multiplied Crystal Oscillator (GMXO-FR)**

P/N:

501-28809

Rev:

-

Date:

03-02-15

Drawn:

62821

Ref:

Tolerances:
(except as noted)
Dimensions are in inches

0.XX Dec:

±0.030"

0.XXX Dec:

±0.010"

FSCM:

62821

Page 1 of 1